



PHARMACEUTICAL BALANCES WLC C/2



Pharmaceutical balances series WLC C/2 are designed for fast and precise mass determination in laboratory and industrial conditions. They can also be used in areas with no access to mains (230V), as their standard equipment they include internal rechargeable battery and RS 232 output. All kinds of this balance are equipped with stainless steel weighing platform and backlit LCD display providing good reading of weighing result.

Balances have possibility of weighing loads outside weighing platform (so called under hook weighing). where a load is hanged under the instrument. This is an alternative for weighing loads with non-standard dimensions and shapes. This means of weighing is also useful for determination of density of solids and liquids with application of standard functions of the balance.

-  Counting pieces
-  Checkweighing
-  Animal weighing
-  Percentage
-  Caps lock of max indication
-  Measurement in Newton

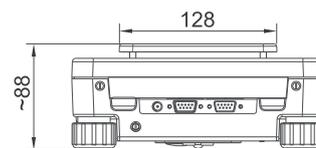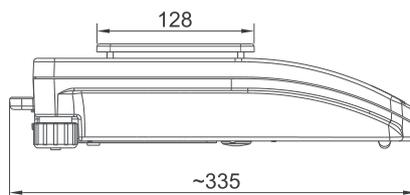

Technical data:

	WLC 0,6/A1/C/2
Max capacity	0,6 kg
Readability	0,01 g
Tare range	-0,6 kg
Repeatability	0,02 g
Linearity	±0,2 g
Pan size	128 × 128 mm
Power supply	230V / 11V AC or 120V / 11V AC, and accumulator
Calibration	internal (automatic)
IP rating	IP 43
Stabilization time	3 s
Working temperature	+15° - +30 °C
Display	LCD (backlit)

Additional equipment:

"KAFKA" THERMAL PRINTER	RACK FOR UNDER HOOK WEIGHING
NEEDLE PRINTER "EPSON"	LCD ADDITIONAL DISPLAY
CITIZEN LABEL PRINTER	EXTERNAL RECHARGEABLE BATTERY PACK
PC KEYBOARD	SUITCASE FOR BALANCE
FOOT BUTTON FOR TARE OR PRINT FUNCTIONS	COMPUTER SOFTWARE: PW-WIN 2005, RAD-KEY 2000